

ProLine® XE Atmospheric Vent

Features

Energy Savings


- Exceed NRCan energy efficiency standards
- Built-in heat traps on the water inlet and outlet reduce the amount of heat lost through piping

Designed for Performance

- ProLine® XE models are residential water heaters with commercial-grade quality
- Flue damper for increased energy efficiency and performance
- 24 Volt Gas Valve offers:
 - Diagnostic capabilities
 - Monitoring of damper to ensure proper operation and safety
 - Spark ignition eliminating the need for a standing pilot
- Robust 1/4" pilot tubing
- Durable brass drain valve
- Turbulator dip tube reduces sediment build-up at bottom of the tank
- Glass lining provides superior protection against tank corrosion
- Plugs into a standard 110/120V outlet (10 ft. power cord included)

Serviceability

- Easy-to-access Combustion chamber
- Conveniently located T&P and drain valve for ease of installation and serviceability
- Top mounted heavy duty anode rod for added tank protection



WARRANTY
6 year limited tank and parts

PERFORMANCE

Model	Series	Capacity	Input*	Maximum Certified Altitude	Recovery Rate at 90°F Temperature Rise	First Hour Rating	UEF	Warranty Tank/Parts
		USG (L)	BTU/h	FT (M)	GPH (LPH)	USG (L)		Years
NATURAL GAS								
JW640S40N-AV-ES2	100/101	40 (151)	40,000	10,100 (3,078)	41 (155)	67 (254)	0.66	6/6
JW640T40N-AV-ES2	100/101	40 (151)	40,000	10,100 (3,078)	41 (155)	67 (254)	0.64	6/6
JW650S40N-AV-ES2	100**	50 (189)	40,000	10,100 (3,078)	41 (155)	81 (307)	0.69	6/6
JW650T40N-AV-ES2	100/101	50 (189)	40,000	10,100 (3,078)	41 (155)	81 (307)	0.69	6/6

Propane models sub N with P. Natural gas models are series 100. Propane models are series 101. All models comply with national energy efficiency regulations.



*Propane Gas – 36,000 for the 40 gallon models and 37,000 for the 50 gallon tall models.

**50 USG Short models are not available for Propane.

DIMENSIONS & SHIPPING WEIGHT

Model	Installation Height	Height to Top of Tank	Tank Diameter	Height to Gas Inlet	Hot Connection to Cold Connection	Height to T&P	Drafthood Connector Diameter	Shipping Weight
	A IN (CM)	B IN (CM)	C IN (CM)	D IN (CM)	E IN (CM)	F IN (CM)	IN	LB (KG)
JW640S40N-AV-ES2	54 (137)	47 ¾ (121)	22 (56)	13 (33)	8 (20)	41 (104)	3 or 4	149 (68)
JW640T40N-AV-ES2	64 ¼ (163)	58 ¼ (148)	20 (51)	13 (33)	8 (20)	51 ¾ (131)	3 or 4	152 (69)
JW650S40N-AV-ES2	55 ¾ (142)	49 ½ (126)	24 (61)	13 (33)	8 (20)	42 ½ (108)	3 or 4	183 (83)
JW650T40N-AV-ES2	63 ½ (161)	57 ¼ (145)	22 (56)	13 (33)	8 (20)	50 ¼ (128)	3 or 4	167 (76)

PREFERRED INSTALLATION

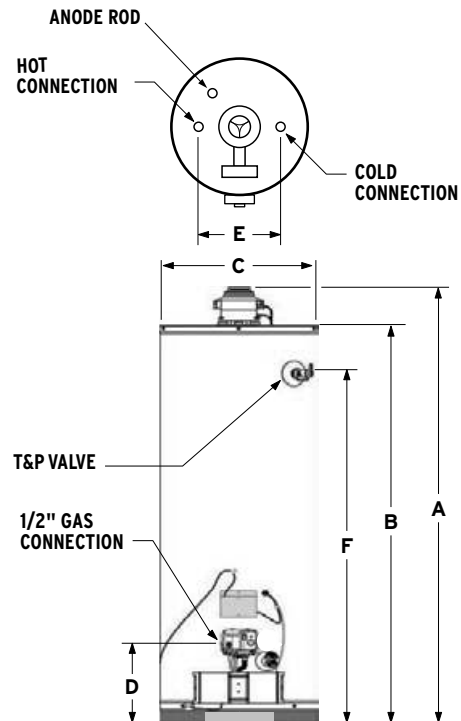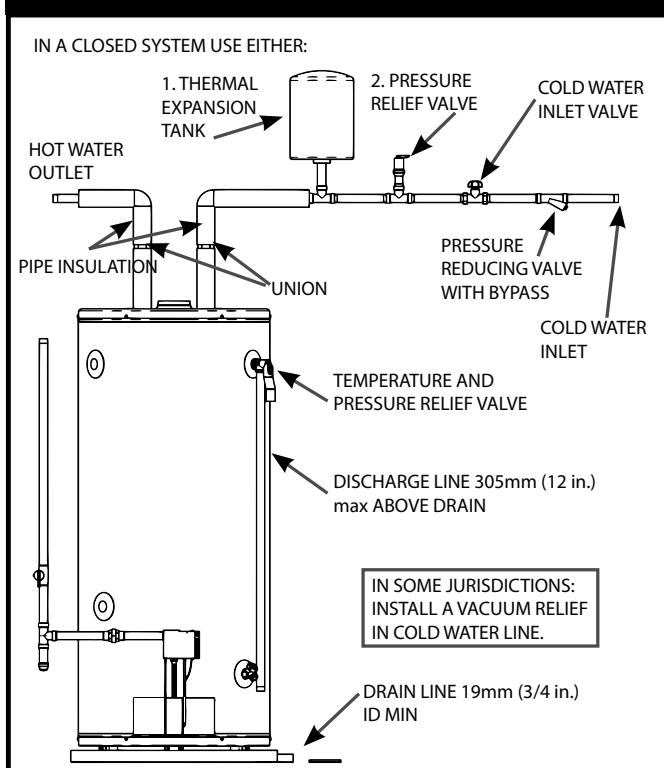

Maximum Hydrostatic Working Pressure: 150 PSI.